



MATERIALS	
ZC	HDG
04	STAINLESS STEEL AISI 304L
16	STAINLESS STEEL AISI 316L

CODE			DIMENSIONS (mm)			THICKNESS (mm)	WEIGHT (Kg/mt)
GROUP	MATERIAL	TYPE	A	H	L		
PK	ZC	RET	100	100	3000	1,5	3,9
PK	ZC	RET	150	100	3000	1,5	4
PK	ZC	RET	200	100	3000	1,5	4,2
PK	ZC	RET	300	100	3000	1,5	4,5
PK	ZC	RET	400	100	3000	1,5	4,9
PK	ZC	RET	450	100	3000	1,5	
PK	ZC	RET	500	100	3000	1,5	5,2
PK	ZC	RET	600	100	3000	1,5	5,5

On request cable trays are supplied with different dimensions of width, flange, height, thickness and length (Max mm 6000)

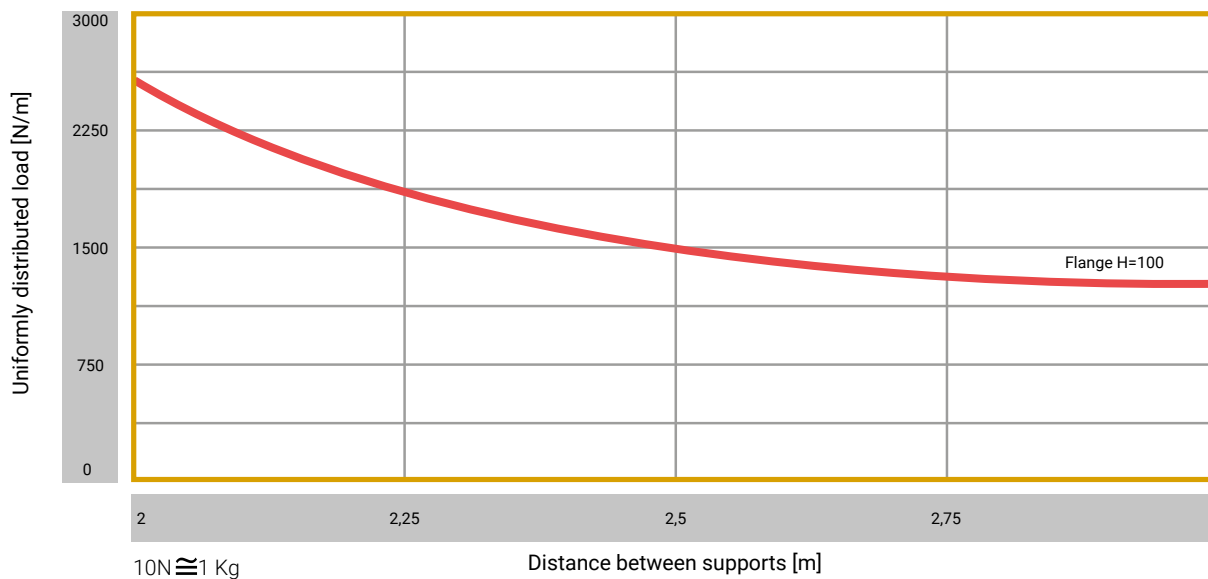


Approximate max uniformly distributed load curve with arrow measured on the center line no more than 1/150 of distance between the supports.

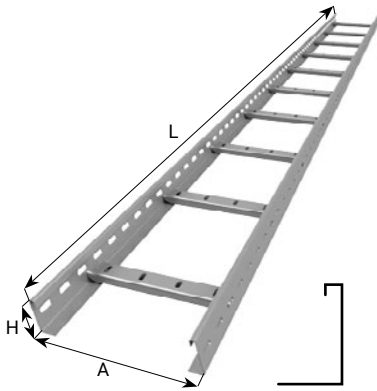

MATERIALS	
ZC	HDG
04	STAINLESS STEEL AISI 304L
16	STAINLESS STEEL AISI 316L

CODE			DIMENSIONS (mm)			THICKNESS (mm)	WEIGHT (Kg/mt)
GROUP	MATERIAL	TYPE	A	H	L		
PF	ZC	RET	100	100	3000	1,5	3,78
PF	ZC	RET	150	100	3000	1,5	3,90
PF	ZC	RET	200	100	3000	1,5	4,05
PF	ZC	RET	300	100	3000	1,5	4,30
PF	ZC	RET	400	100	3000	1,5	4,60
PF	ZC	RET	450	100	3000	1,5	
PF	ZC	RET	500	100	3000	1,5	4,90
PF	ZC	RET	600	100	3000	1,5	5,25

On request cable trays are supplied with different dimensions of width, flange, height, thickness and length (Max mm 6000)

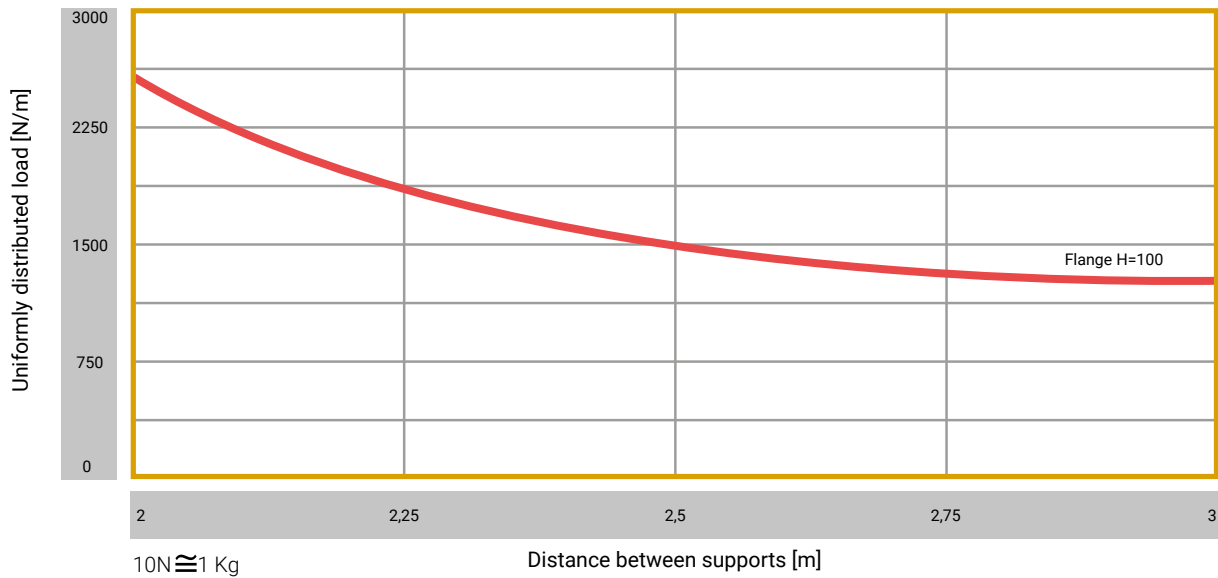

Approximate max uniformly distributed load curve with arrow measured on the center line no more than 1/150 of distance between the supports.