


| MATERIALS |                           |
|-----------|---------------------------|
| SE        | ZINC COATING "SENDZIMIR"  |
| ZC        | HDG                       |
| 04        | STAINLESS STEEL AISI 304L |
| 16        | STAINLESS STEEL AISI 316L |



| GROUP | CODE     |      | DIMENSIONS (mm) |     |      | THICKNESS (mm) | WEIGHT (Kg/mt) |
|-------|----------|------|-----------------|-----|------|----------------|----------------|
|       | MATERIAL | TYPE | A               | H   | L    |                |                |
| AR    | ZC       | RET  | 50              | 50  | 3000 | 1,5            | 1,88           |
| AR    | ZC       | RET  | 75              | 50  | 3000 | 1,5            | 2,16           |
| AR    | ZC       | RET  | 75              | 75  | 3000 | 1,5            | 2,70           |
| AR    | ZC       | RET  | 100             | 50  | 3000 | 1,5            | 2,50           |
| AR    | ZC       | RET  | 100             | 75  | 3000 | 1,5            | 2,90           |
| AR    | ZC       | RET  | 100             | 100 | 3000 | 1,5            | 3,51           |
| AR    | ZC       | RET  | 150             | 50  | 3000 | 1,5            | 2,97           |
| AR    | ZC       | RET  | 150             | 75  | 3000 | 1,5            | 3,51           |
| AR    | ZC       | RET  | 150             | 100 | 3000 | 1,5            | 4,05           |
| AR    | ZC       | RET  | 200             | 50  | 3000 | 1,5            | 3,51           |
| AR    | ZC       | RET  | 200             | 75  | 3000 | 1,5            | 4,10           |
| AR    | ZC       | RET  | 200             | 100 | 3000 | 1,5            | 4,60           |
| AR    | ZC       | RET  | 300             | 50  | 3000 | 1,5            | 4,60           |
| AR    | ZC       | RET  | 300             | 75  | 3000 | 1,5            | 5,20           |
| AR    | ZC       | RET  | 300             | 100 | 3000 | 1,5            | 5,70           |
| AR    | ZC       | RET  | 400             | 75  | 3000 | 1,5            | 6,55           |
| AR    | ZC       | RET  | 400             | 100 | 3000 | 1,5            | 7,10           |
| AR    | ZC       | RET  | 500             | 75  | 3000 | 1,5            | 7,30           |
| AR    | ZC       | RET  | 500             | 100 | 3000 | 1,5            | 7,90           |
| AR    | ZC       | RET  | 600             | 75  | 3000 | 1,5            | 8,40           |
| AR    | ZC       | RET  | 600             | 100 | 3000 | 1,5            | 8,90           |

On request cable trays are supplied with different dimensions of width, flanges, height, thicknesses and length (Max mm 4000)

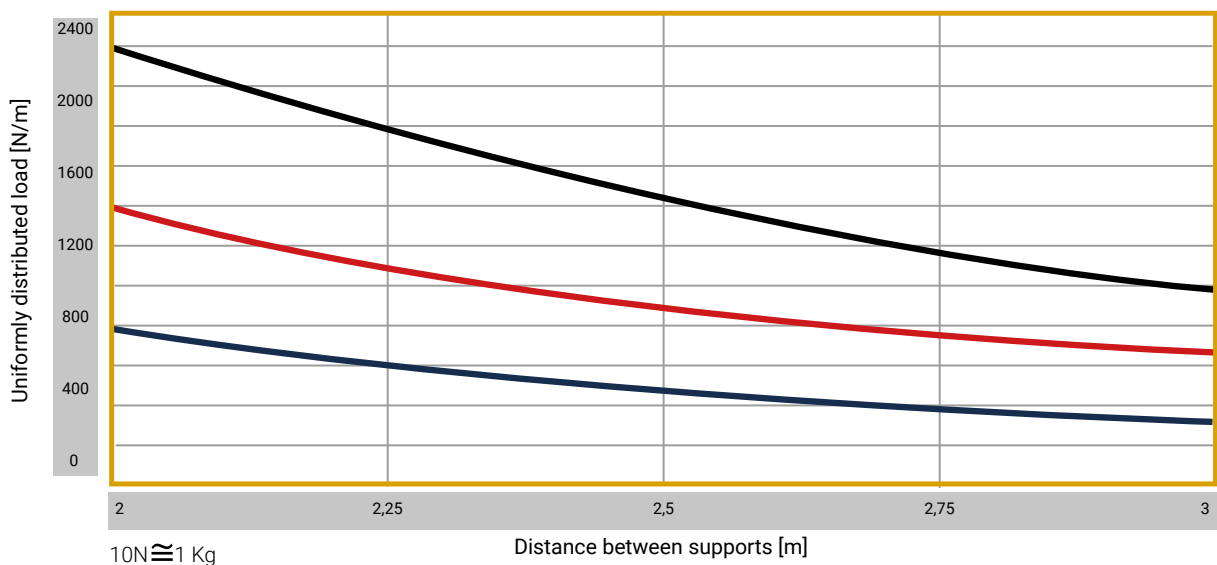

Approximate max uniformly distributed load curve with arrow measured on the center line no more than 1/150 of distance between the supports.