

Execution:

Ex d [ia] IIB + H2 T6 Gb
Ex tb [ia] IIIC T85°C Db IP66

Applicable standards:

EN 60079-0, EN 60079-1, EN 60079-11,
EN 60079-31

Protection degree: IP66

Ambient temperature:



-60°C / +60°C

Installation area: zone 1 – 2 (Gas) zone
21 – 22 (Dust)

Material:

Body - copper free aluminium
Cover - copper free aluminium
External screws - stainless steel
Internal plate - hot dip galvanized steel
External painting - epoxy powders RAL
9006
Hinges - casting on body and cover
enclosure

CODE	DIMENSIONS (mm)					WEIGHT (Kg)
	A	B	C	D	E	
13.02.01.01.04.00000	285	245	160	276	169	12,00

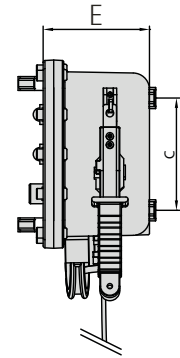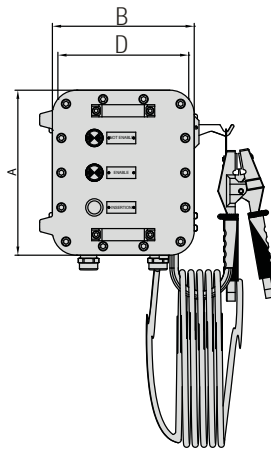

Execution:

Ex d [ia] IIB + H2 T6 Gb
Ex tb [ia] IIIC T85°C Db IP66

Applicable standards:

EN 60079-0, EN 60079-1, EN 60079-11,
EN 60079-31

Protection degree: IP66

Ambient temperature:

-60°C / +60°C

Installation area: zone 1 – 2 (Gas) zone
21 – 22 (Dust)

Material:

Body - copper free aluminium
Cover - copper free aluminium
External screws - stainless steel
Internal plate - hot dip galvanized steel
External painting - epoxy powders RAL
9006
Hinges - casting on body and cover
enclosure

CODE	DIMENSIONS (mm)					WEIGHT (kg)
	A	B	C	D	E	
13.02.01.01.04.00001	285	245	169	226	170	13,00