




Pali Poles

PALO CONICO DA LAMIERA CONICAL SHEET STEEL POLE

In acciaio zincato a caldo.
Lavorazioni standard alla base.

Hot dip galvanized steel;
With standard machining at the base.

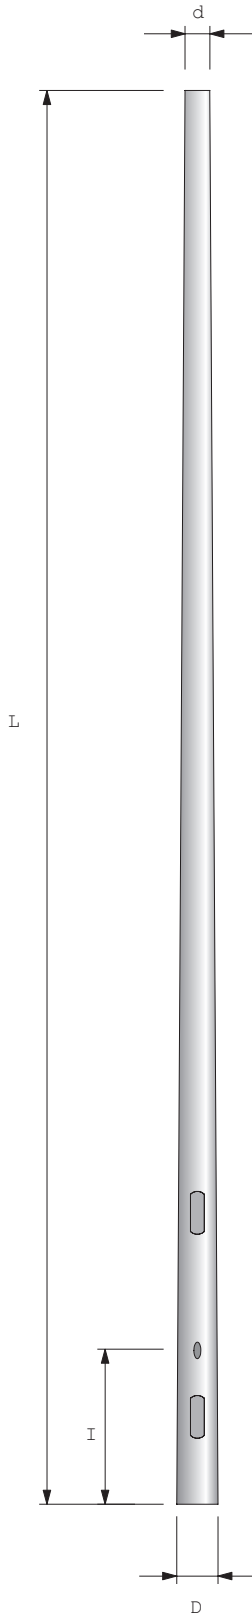

CODICE CODE	L	I	SPESSORE THICKNESS	D	d	VERNICIATO PAINTING	PESO WEIGHT
	mm	mm	mm	mm	mm	m ²	kg
09.06.14.03.00000500	3.500	500	3	95	60	0,85	20,0
09.06.14.03.00000501	4.000	500	3	100	60	1,00	23,0
09.06.14.03.00000502	4.500	500	3	105	60	1,17	27,0
09.06.14.03.00000503	5.000	500	3	110	60	1,34	31,0
09.06.14.03.00000504	5.500	500	3	115	60	1,51	35,0
09.06.14.03.00000505	5.500	500	4	115	60	1,51	46,0
09.06.14.03.00000506	6.000	500	3	120	60	1,70	41,0
09.06.14.03.00000507	6.800	800	3	128	60	2,01	46,0
09.06.14.03.00000508	6.800	800	4	128	60	2,01	62,0
09.06.14.03.00000509	7.800	800	3	138	60	2,29	55,0
09.06.14.03.00000510	7.800	800	4	138	60	2,29	77,0
09.06.14.03.00000511	8.800	800	3	148	60	2,88	66,0
09.06.14.03.00000512	8.800	800	4	148	60	2,88	91,0
09.06.14.03.00000513	9.300	800	3	153	60	3,11	74,0
09.06.14.03.00000514	9.300	800	4	153	60	3,11	98,0
09.06.14.03.00000515	9.800	800	3	158	60	3,36	79,0
09.06.14.03.00000516	9.800	800	4	158	60	3,36	107,0
09.06.14.03.00000517	10.300	800	3	163	60	3,61	85,0
09.06.14.03.00000518	10.300	800	4	163	60	3,61	113,0
09.06.14.03.00000519	10.800	800	3	168	60	3,87	93,0
09.06.14.03.00000520	10.800	800	4	168	60	3,87	123,0
09.06.14.03.00000521	11.300	800	4	173	60	4,14	99,0
09.06.14.03.00000522	11.300	800	4	173	60	4,14	130,0
09.06.14.03.00000523	11.800	800	4	178	60	4,41	141,0
09.06.14.03.00000524	12.300	800	4	183	60	4,69	148,0
09.06.14.03.00000525	12.800	800	4	188	60	4,99	158,0




Pali Poles

PALO CONICO DA LAMIERA CURVATO BRACCIO SINGOLO BENT CONICAL SHEET STEEL POLE WITH SINGLE BRACKET

In acciaio zincato a caldo.
Lavorazioni standard alla base.

Hot dip galvanized steel;
With standard machining at the base.

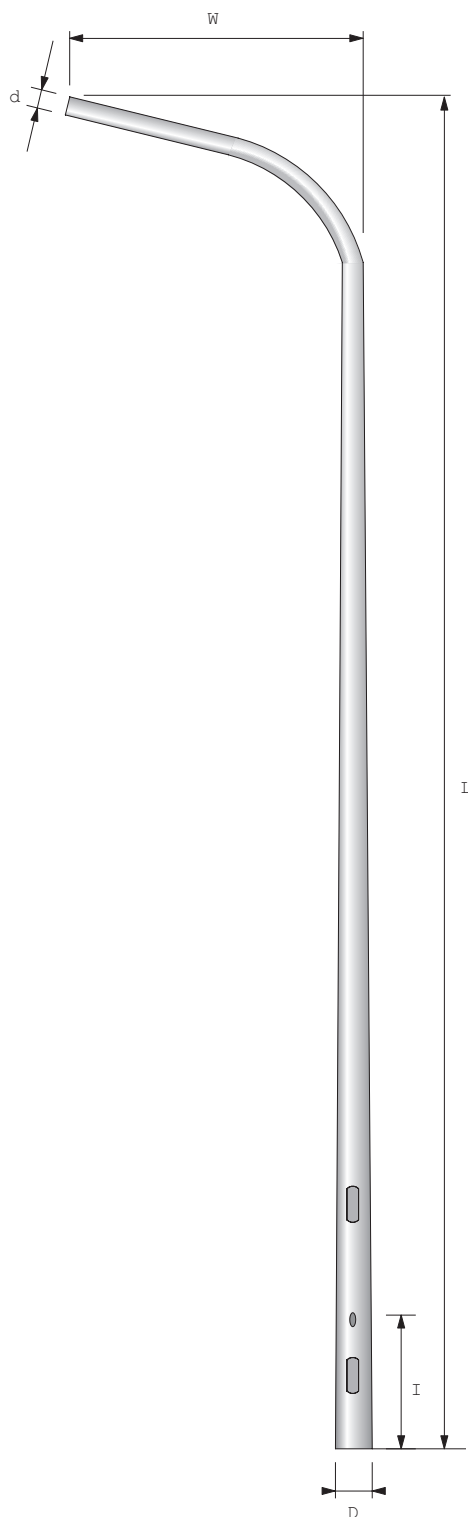

CODICE CODE	L	I	w	SPESSORE THICKNESS	D	d	VERN. PAINTING	PESO WEIGHT
	mm	mm	mm	mm	mm	mm	m ²	kg
09.06.16.03.00000600	8.600	800	1.200	3	153	60	3,11	74,0
09.06.16.03.00000601	8.800	800	2.500	4	163	60	3,61	113,0
09.06.16.03.00000602	8.800	800	2.500	3	163	60	3,61	86,0
09.06.16.03.00000603	7.800	800	1.750	3	148	60	2,88	66,0
09.06.16.03.00000604	9.800	800	2.500	3	173	60	4,41	100,0
09.06.16.03.00000605	8.000	800	2.250	3	153	60	3,11	74,0
09.06.16.03.00000606	10.400	800	1.500	3	173	60	4,14	100,0
09.06.16.03.00000607	9.800	800	2.500	4	173	60	4,14	130,0
09.06.16.03.00000608	10.800	800	2.500	4	183	60	4,69	149,0
09.06.16.03.00000609	9.600	800	1.200	3	163	60	3,61	86,0




Pali Poles

PALO CONICO DA LAMIERA CURVATO BRACCIO DOPPIO BENT CONICAL SHEET STEEL POLE WITH DOUBLE BRACKET

In acciaio zincato a caldo.
Lavorazioni standard alla base.
Il doppio braccio è sempre fornito smontato
predisposto per l'accoppiamento mediante grani di
bloccaggio.

*Hot dip galvanized steel;
With standard machining at the base.
The double bracket is always supplied not
assembled and it is ready to be joined with screws
and nuts.*

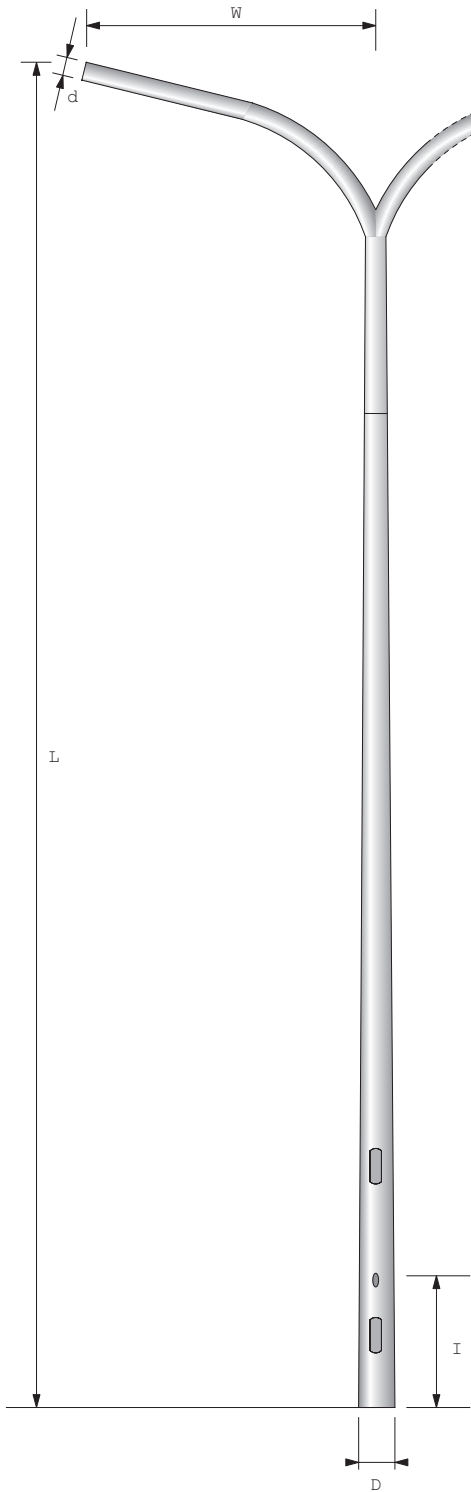

CODICE CODE	L	I	W	SPESSORE THICKNESS	D	d	VERN. PAINTING	PESO WEIGHT
	mm	mm	mm	mm	mm	mm	m ²	kg
09.06.15.03.00000700	9.800	800	2.500	3	173	60	5,20	121,0
09.06.15.03.00000701	10.800	800	2.500	4	183	60	5,20	177,0
09.06.15.03.00000702	8.800	800	2.500	3	163	60	4,50	108,0
09.06.15.03.00000703	9.800	800	2.500	4	173	60	4,50	161,0
09.06.15.03.00000704	8.800	800	2.500	4	163	60	4,50	123,0