

Body in thermo-plastic material, grey colour.


Adjusting holder in die-cast aluminium.

Flat transparent glass diffuser, 5 mm thick, tempered, heat-proof and crash-proof.

Silicone gaskets. Reflector in pure aluminium 99.8%, 0.8 mm thick, with anodized and polished surface. Cut-off optic. Outside bolts and screws in inox steel. This streetlight can be installed on either horizontal or vertical poles, with diameter \varnothing 76mm to \varnothing 60mm. Goniometer for inclination adjustment: it can be oriented from -5° to $+15^\circ$ on vertical pole and from -15° to $+15^\circ$ on horizontal pole. Routine and unscheduled maintenance are easier, thanks to the 3 clips opening system of the upper body. Opening rotation of the upper body is on the road side. Supporting tray for electrical control gear removable and equipped with fast connectors, is in thermoplastic material. Pre-adjustment for darkness sensor. Streetlight available in insulation class II.

Protection degree: IP65.

CODE	POWER (W)	CONNECTION	LAMP	WEIGHT (Kg)
04.02.02.02.00000200	70	E27	SE	9,0
04.02.02.02.00000201	70	E27	ME	9,0
04.02.02.02.00000202	80	E27	QE	9,4
04.02.02.02.00000203	100	E40	ST	9,4
04.02.02.02.00000204	125	E27	QE	9,4
04.02.02.02.00000205	150	E40	ST	9,4
04.02.02.02.00000206	150	E27	ME	9,4
04.02.02.02.00000207	250	E40	ST	9,4
04.02.02.02.00000208	250	E40	MT	9,4
04.02.02.02.00000209	250	E40	QE	9,4

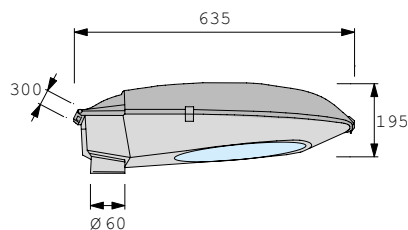

Body in die casting of aluminium, painted with RAL 7035 epoxy powders, blank previously phosphochrome plated.
 Reflector made of pure anodised and printed aluminium.
 Diffuser made of fl at tempered glass (5 mm thick).
 Silicone gaskets are placed on glass and on the accessories box.
 Suitable for poles installation Ø 60 mm.
 Adjustable inclination with the rotating system in pressure die casting aluminium.
 External screws and clock work made of stainless steel. Lamp holder E40 made of ceramic, it is placed in a removable aluminium glass, it can be opened withturn without the usage of tools.
 Power supply placed in a glass-nylon plate for Class II and in galvanized iron for Class I.

Protection degree: IP54.

CODE	POWER (W)	CONNECTION	LAMP	WEIGHT (Kg)
04.02.02.02.00000500	100	E40	ST	9,5
04.02.02.02.00000501	150	E40	ST	9,5
04.02.02.02.00000502	250	E40	ST	10,5
04.02.02.02.00000503	100	E40	ME	9,5
04.02.02.02.00000504	150	E40	ME	9,5
04.02.02.02.00000505	250	E40	ME	10,5
04.02.02.02.00000506	250	E40	QE	10,5